
HOKOLITE

Light that keeps you going

2026.10

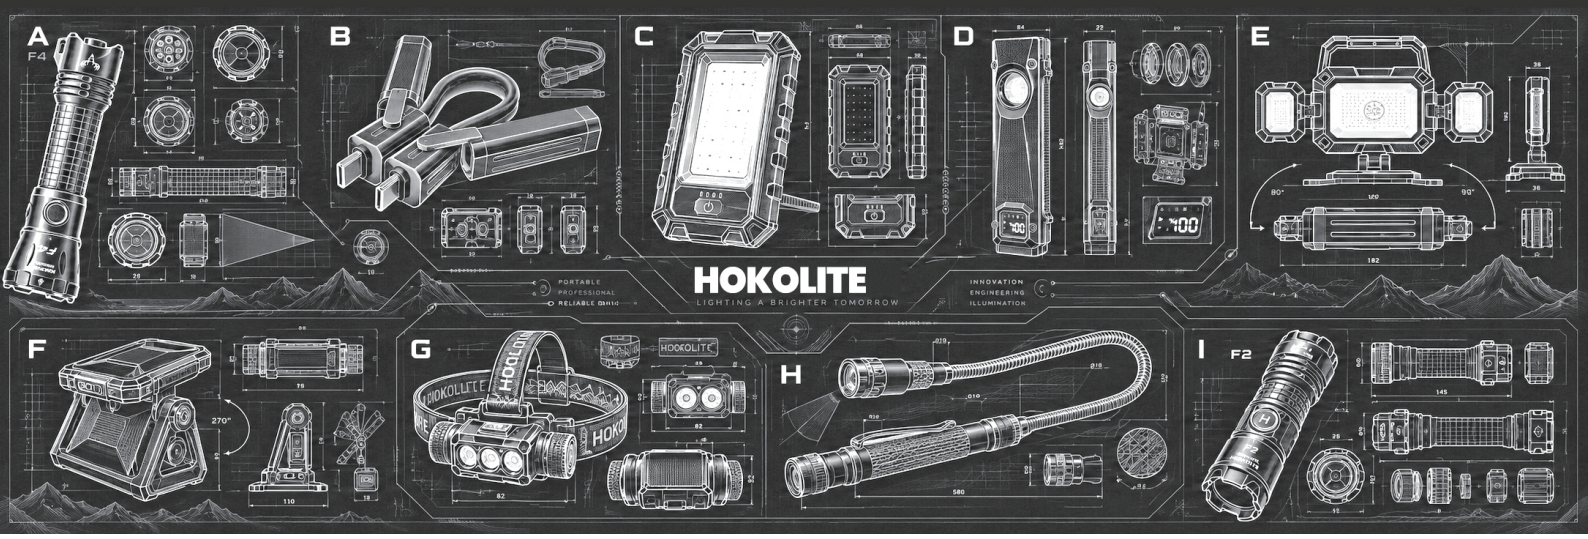

COMPANY PROFILE

Ningbo Yinzhou Adelante Lighting Co., Ltd, specializes in innovative portable lighting. As a professional manufacturer and exporter, we provide high-quality lighting solutions worldwide.

Our products include LED headlamps, work lights, portable lanterns, night lights, bike lights, and spotlights. We offer full OEM services for branding, colors, manuals, and packaging.

Quality is our foundation. Our factory is ISO9001 and ISO14001 certified, BSCI audited, and operates a fully equipped testing lab to ensure all products meet or exceed standards.

Innovation drives us. Our R&D team follows a forward-looking roadmap, launching market-responsive products and holding over 200 patents.

Backed by a professional supply chain, we guarantee on-time delivery and stable logistics. Partner with us for :

- Original design
- Rigorous QC
- Efficient logistics
- E-commerce support
- Professional visuals

Join us as a strategic partner in portable lighting and experience quality and innovation. Contact us for custom solutions.

Based in Ningbo, China, we serve the global market — your trusted partner in personal lighting.



Body Material	Aluminum Alloy	LED Type	4 LEDs: White Spot + White Flood + Green + Red
Net Weight	125 g	Dimensions	38 x 30 x 105 mm
IP Rating	IPX6	Power	20 W
Impact Resistance	1 m	Battery Type	18650 3.7V / 2500mAh
Color Temperature (K)	White: 6000–6500K; Green: 530±10nm; Red: 650±10nm		
Light Modes	White Spot / White Flood / Green / Red (High/Mid/Low) ; Magnetic Selector + Side Switch, Long-press 2s for Turbo		

Mode	White Spot	White Flood	Green	Red
Light Output	1500 Lumens	500-600 Lumens	210-250 Lumens	220-250 Lumens
Beam Distance	500 m	30-40 m	346 m	275 m





HOKOLITE




Model: 8125

Rechargeable Sliding Flashlight

Body Material	Aluminum Alloy
Dimensions	44 x 44 x 190 mm
Net Weight	384 g
LED Type	LHp50-3
IP Rating	IPX7
Impact Resistance	1 m
Power	28 W
Battery Type	18650 3.7V / 2200mAh
Color Temperature (K)	LED / COB: 6000-7000K ; COB R: 1000K
Light Modes	LED100% / COB(white)100% / COB(red)100% / COB(red)flash; COB(red)Stepless Dimming

Mode	LED High	LED Low	COB High	COB Low	COB R
Light Output	2000 Lumens	200 Lumens	500 Lumens	50 Lumens	40 Lumens
Beam Distance	408m	125m	33m	10m	9m
RunTime	2 Hours	12 Hours	4 Hours	24 Hours	60 Hours





HOKOLITE



Model: 7477

Dual Light Source Tactical EDC Flashlight


Body Material	Zinc Alloy+PC+Nylon
Dimensions	40 x 24 x 134mm
Net Weight	186 g
LED Type	COB + XPE
IP Rating	IP54
Impact Resistance	1 m
Power	20W
Battery Type	Li-Polymer 3.7V 3000mAh
Color Temperature (K)	COB White: 6000–7000K; XPE White: 6000–7000K; COB Red
Light Modes	COB(white)High/Mid/Low/Eco / COB(red)Flash; XPE(white)High/ Mid/Low/Eco

Mode	XPE High	COB High	COB Low
Light Output	2000 Lumens	500 Lumens	250 Lumens
RunTime	2 Hours	5 Hours	8 Hours





HOKOLITE

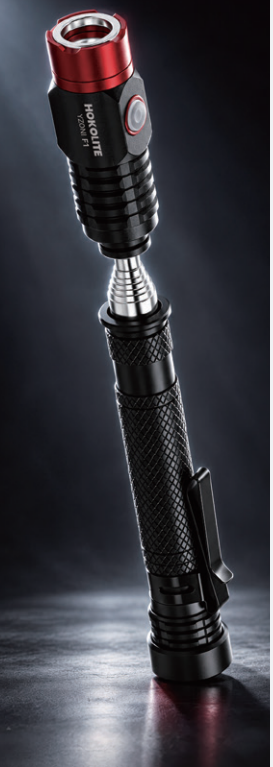



Model: 8084

Telescoping Inspection Flashlight

Body Material	Aluminum Alloy
Dimensions	196 x 25.8 x 23mm
Net Weight	131 g
LED Type	RTL-80 3535
IP Rating	IP44
Impact Resistance	1 m
Power	4.2 W
Battery Type	14280 3.7V / 600mAh
Color Temperature (K)	LED: 7000K
Light Modes	Turbo / High / Mid / Low (Double-click for Turbo, tap to cycle)

Mode	Turbo	High	Mid	Low
Light Output	300 Lumens	150 Lumens	80 Lumens	25 Lumens
Beam Distance	70m	48m	35m	18m
RunTime	/	2 Hours	3.5 Hours	8 Hours

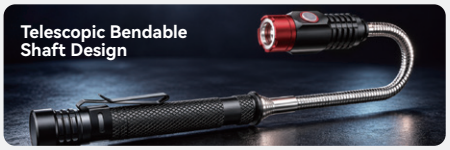



HOKOLITE



Model: 8126

Rechargeable Pen Light

Body Material	Aluminum Alloy
Dimensions	169 x 18 x 15.5mm
Net Weight	79.2 g
LED Type	Main 5W + COB + UV 365nm
IP Rating	IPX3
Impact Resistance	1 m
Power	5 W
Battery Type	10850 3.7V / 750mAh
Color Temperature (K)	Main LED: ~7500K; COB: ~6000K; UV: 365nm
Light Modes	Main LED High / Main LED Low / COB High / COB Low / COB Strobe / UV 365nm; Double-click for COB, Long-press 2s for UV, Memory Mode

Mode	LED High	LED Low	COB High	COB Low	UV 365nm
Light Output	400 Lumens	150 Lumens	500 Lumens	150 Lumens	5 Lumens
Beam Distance	56.5m	30m	26.8m	15.5m	/
RunTime	2.5 Hours	6 Hours	2 Hours	8 Hours	5 Hours





HOKOLITE


Rechargeable 3-Panel Foldable Work Light



Model: **7646**

Body Material	ABS + PC + TPR	LED Type	White Laser + COB
Net Weight	800g	Operating Voltage	362x118x344mm(Extended) 210x83x250mm(Folded)
IP Rating	IPX3	Power	20 W
Impact Resistance	1 m	Battery Type	21700 3.7V / 6000mAh
Color Temperature (K)	COB: 6000–7000K; White Laser: 6000–7000K		
Light Modes	White Laser 100% / Front COB / Left COB / Left+Right COB / Front+Left+Right COB / White Laser Flash		

Mode	White Laser	Front COB	Left COB	L+R COB	All COB	Laser Flash
Light Output	250 Lumens	1400 Lumens	800 Lumens	1500 Lumens	2100 Lumens	250 Lumens
RunTime	24 Hours	9 Hours	10.5 Hours	5.7 Hours	5 Hours	24 Hours

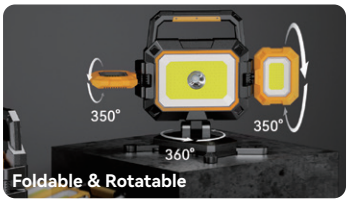



HOKOLITE


Rechargeable Clip Work Light




Model: **7684**

Body Material	ABS + PC	LED Type	White Laser 5W LED + COB
IP Rating	IPX3	Power	10W
Dimensions	110 x 210 x 92mm	Battery Type	18650 3.7V / 4000mAh
Color Temperature (K)	COB: 6500–7500K; LED: 6500–7000K; COB Red		
Light Modes	White Laser LED100% / Main COB / Left COB / Left+Right COB / Main+Left+Right COB / White Laser LED Strobe		

Mode	COB High	COB Mid	COB Low	COB R	LED High	LED Low
Light Output	1000 Lumens	500 Lumens	150 Lumens	60 Lumens	200 Lumens	100 Lumens
RunTime	3 Hours	7.5 Hours	10 Hours	5.7 Hours	5.7 Hours	15 Hours







HOKOLITE

Rotating Mag Handles Work Light





Model: **7434**

Body Material	ABS	LED Type	3535LED + COB
Dimensions	190x150x40mm(Extended) 150x130x65mm(Folded)	Battery Type	18650 3.7V / 4000mAh
IP Rating	IPX3	Power	12W
Color Temperature (K)	COB: 6500K; LED: 6500K; COB Red		
Light Modes	COB(Single) / COB(Dual) / COB(red)On / COB(red)Flash; COB(white) High/Med/Low, LED Side High		

Mode	COB Dual High	COB Dual Low	COB Single High	COB Single Low	LED High	COB R
Light Output	1500 Lumens	350 Lumens	880 Lumens	200 Lumens	270 Lumens	60 Lumens
RunTime	2.3 Hours	6.5 Hours	3.8 Hours	8.3 Hours	8 Hours	/







HOKOLITE

Pivoting Magnetic Work Light




Model: **8032**

Body Material	ABS + PC	LED Type	COB
Net Weight	430g	Dimensions	163 x 110 x 77 mm
IP Rating	IPX4	Power	15 W
Impact Resistance	1 m	Battery Type	18650 3.7V / 4000mAh
Color Temperature (K)	COB: 5500–6500K		
Light Modes	COB 100% / COB 50% / SOS / Strobe / OFF		

Mode	COB High	COB Low
Light Output	1500 Lumens	850 Lumens
Beam Distance	28 m	20 m
RunTime	2 Hours	5 Hours



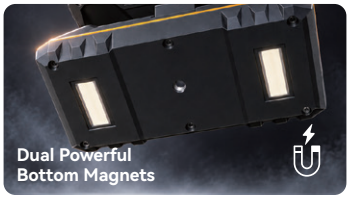

HOKOLITE


Tough Bright Mag COB Work Light

Model: **0108**



Body Material	ABS+PC+Nylon	LED Type	3W XPE+COB
Net Weight	150g	Dimensions	110x58x25mm
IP Rating	IPX3	Power	8W
Impact Resistance	1 m	Battery Type	3.7V / 3000mAh Li-Polymer
Color Temperature (K)	COB:6000–7000K; XPE:6000–7000K; COB Red		
Light Modes	COB(white)100% / COB(white)50% / XPE(white)100% / COB(red)flash;		

Mode	COB High	COB Low	XPE High
Light Output	700 Lumens	350 Lumens	180 Lumens
RunTime	5 Hours	8 Hours	8 Hours







HOKOLITE

4-in-1 Mag Dock Light

Model: **1486**



Body Material	ABS+PC+Nylon	LED Type	3W XPE+COB
Net Weight	850g	Operating Voltage	4.2 V
Dimensions	270x85x240 mm(Complete Set) Single Light: 110x58x25 mm	Power	24 W
Impact Resistance	1 m	Battery Type	Polymer 3.7V 12000mAh
Color Temperature (K)	COB White: 6000–7000K; XPE White: 6000–7000K; COB Red		
Light Modes	COB(white)100% / COB(white)50% / XPE(white)100% / COB(red)Flash (6Hz)		

Mode	COB High	COB Low	XPE High
Light Output	3600 Lumens	350 Lumens	540 Lumens
RunTime	5 Hours	8 Hours	8 Hours





HOKOLITE


Dual-Power 360° COB Camping Lantern


Model: **8128**




Body Material	ABS+PC	LED Type	Ring COB, Ra>70
Net Weight	528g	Dimensions	189x106x106mm
IP Rating	IPX4	Power	10W
Impact Resistance	1 m	Battery Type	20650 3.7V/2600 mAh or 3 × C Batteries
Color Temperature (K)	COB White: 7000–8000K; COB Red		
Light Modes	360° White / 240° White / 120° White / COB(red)On / COB(red)Flash; Stepless Dimming (long press), Memory Mode		

Mode	360° High	240° Mid	120° Low	COB R
Light Output	1000 Lumens	650 Lumens	300 Lumens	10 Lumens
Beam Distance	22 m	20 m	18 m	/
RunTime	3 Hours	4.5 Hours	10 Hours	/







HOKOLITE

2-in-1 Underhood & Wearable Work Light

Model: **8127**



Body Material	ABS+TPR	LED Type	COB
Net Weight	305g	Dimensions	Extended Length 1900mm
IP Rating	IPX4	Power	10 W
Impact Resistance	1 m	Battery Type	18650 3.7V / 4400mAh
Color Temperature (K)	COB White: 6500K; COB Red		
Light Modes	COB High / COB Mid / COB Low / COB(red)On / COB(red)Flash; Memory Mode, 8s auto-off, Long-press direct to Red		

Mode	COB High	COB Mid	COB Low	COB R	COB R Flash
Light Output	1000 Lumens	400 Lumens	80 Lumens	18 Lumens	7 Lumens
Beam Distance	35m	23m	10m	4m	4m
RunTime	5 Hours	8 Hours	20 Hours	22 Hours	38 Hours





HOKOLITE

High-Output Multi-Color Aluminum Headlamp



Model: **8077**

Body Material	Aluminum Alloy+ABS	LED Type	SST20 (Spot) + COB
Net Weight	89g	Dimensions	26x87mm
IP Rating	IP44	Power	10W
Impact Resistance	1 m	Battery Type	18650 3.7V / 2500mAh
Color Temperature (K)	Main LED: 6500–7300K, Ra>70		
Light Modes	Spot High / Spot Low / Flood High / Flood Low / Dual High / Dual Low / Blue / Green / Red / Red Flash / Red SOS (Double-click for Dual, Long-press for Colors)		

Mode	Spot High	Spot Low	Dual High	Dual Low
Light Output	626 Lumens	217 Lumens	1100 Lumens	344 Lumens
Beam Distance	96m	30m	/	/
RunTime	7.5 Hours	12.5 Hours	4.5 Hours	8.5 Hours







HOKOLITE

2-in-1 Neck Light with Detachable Flashlights



Model: **8083**

Body Material	Aluminum Alloy	LED Type	P50
Net Weight	267.5g	Dimensions	107 x 26 x 20mm
IP Rating	IP44	Power	5.1 W
Impact Resistance	1 m	Battery Type	14500 3.7V / 800mAh
Color Temperature (K)	10000K		
Light Modes	Turbo / High / Mid / Low (Double-click for Turbo, tap to cycle)		

Mode	Turbo	High	Mid	Low
Light Output	500 Lumens	250 Lumens	125 Lumens	35 Lumens
Beam Distance	135m	90m	65m	35m
RunTime	/	2 Hours	3.5 Hours	8 Hours





HOKOLITE

Mini EDC Flashlight with UV & RGB



Model: **8129**

4 Color Options

Body Material	Aluminum Alloy + ABS	LED Type	COB + LED + UV 365nm
Net Weight	35.6g	Dimensions	36 x 36 x 16mm
IP Rating	IPX4	Power	3 W
Impact Resistance	1 m	Battery Type	300mAh Li-Po Battery
Color Temperature (K)	COB White: 6500K		
Light Modes	Modes: Moonlight 2 lm / Medium 100 lm / High 200 lm / 365 nm UV / Side White 10 lm / Red Steady / RGB Color Cycling / Turbo 500 lm		

Mode	Turbo	High	Mid	Moonlight
Light Output	500 Lumens	200 Lumens	100 Lumens	2 Lumens
RunTime	/	2 Hours	3.5 Hours	/





HOKOLITE


4-in-1 EDC Flashlight & USB-C Cablet



Model: **8160**

Body Material	ABS+TPR	LED Type	LED
Data Transfer	480Mbps	Dimensions	12 x 15 x 210mm
Charging	240W PD	Net Weight	68g
Color Temperature (K)	LED: 7000K	Battery Type	300mAh Li-Po Battery
Light Modes	High / Mid / Low (Double-click for Turbo, tap to cycle)		



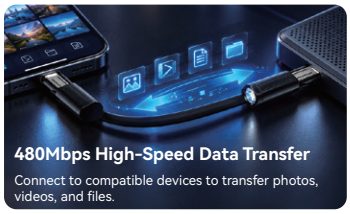





HOKOLITE

Mini Zoomable Flashlight

Model: **8140**



Body Material	Aluminum Alloy	LED Type	LED: 7000K
Net Weight	57 g	Dimensions	26.5 x 26.5 x 98.5mm
IP Rating	IP44	Power	4.2W
Impact Resistance	1 m	Battery Type	14500 3.7V / 800mAh
Color Temperature (K)	LED: 7000K	Light Modes	High / Mid

Mode	High	Mid
Light Output	100 Lumens	30 Lumens
Beam Distance	36m	12m
RunTime	1.5 Hours	15 Hours





HOKOLITE


4-Color Hunting Flashlight with Instant Color Switching

Model: **8152**



Body Material	Aluminum Alloy	LED Type	1×White Main LED + 3×Aux LED(Green/Red/Amber)
Net Weight	300g	Dimensions	56 x 56 x182 mm
Impact Resistance	1 m	Battery Type	21700 3.7V / 4000mAh
Color Temperature (K)	White:6000-6500K; Green:530±10nm; Red:630±10nm; Amber:590±10nm		
Light Modes	White:Low / Mid / High / TurboGreen:Low / HighRed:Low / HighAmber:Low / High8Hz Strobe		

Mode	White Turbo	White High	White Mid	White Low	Green High	Green Low	Red High	Red Low	Amber High	Amber Low
Light Output	2000 Lumens	1000 Lumens	300 Lumens	50 Lumens	300 Lumens	80 Lumens	240 Lumens	60 Lumens	180 Lumens	50 Lumens
Beam Distance	630m	450m	250m	110m	400m	220m	315m	160m	220m	120m







HOKOLITE

Adjustable COB Work Light

Model: **0106**



Body Material	ABS	LED Type	XPE + COB
Net Weight	166g	Battery Type	18650 3.7V / 3600mAh
Dimensions	100 x 30 x 85mm	Power	XPE: 3W / COB: 5W
Light Modes	XPE / COB Yellow / COB White / COB Yellow + White / Red / UV 395nm		

Mode	XPE High	XPE Medium	XPE Low	COB High	COB Medium	COB Low
Light Output	200 Lumens	120 Lumens	40 Lumens	600 Lumens	360 Lumens	120 Lumens
Beam Distance	90m	70m	4m	28m	21m	12m
RunTime	6 Hours	8 Hours	12 Hours	4 Hours	6 Hours	10 Hours





HOKOLITE

Focus + Flood Work Light

Model: **0083**



Body Material	ABS + PA66 + PC	LED Type	3535 LED
Net Weight	120g	Dimensions	86 x 34.5 x 84mm
IP Rating	IPX4	Power	5 W
Impact Resistance	1m	Battery Type	Polymer 103048 3.7V 1500mAh
Color Temperature (K)	6500–7500K		
Light Modes	Floodlight / Spotlight / Dual Light		

Mode	Floodlight	Spotlight	Dual Light
Light Output	400 Lumens	400 Lumens	800 Lumens
Beam Distance	30m	130m	130m
RunTime	4.1 Hours	4.1 Hours	2.3 Hours










Body Material	Aluminum Alloy+PC	LED Type	LTL4AW
Net Weight	72 g	Dimensions	20 x 20 x 120mm
IP Rating	IPX4	Power	15 W
Impact Resistance	1m	Battery Type	14500 3.7V / 1000mAh
Color Temperature (K)	6000–7000K		
Light Modes	Moon / Low / Mid / High / Strobe / SOS; Long-press for Turbo, 10s auto-off memory		

Mode	Turbo	High	Mid	Low
Light Output	1000 Lumens	550 Lumens	180 Lumens	40 Lumens
Beam Distance	90m	70m	38m	17m
RunTime	6 Hours	3.5 Hours	6.5 Hours	20 Hours



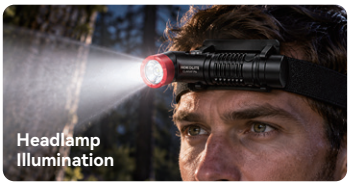

Body Material	ABS	LED Type	3535 Spot + COB Flood
Net Weight	44 g	Dimensions	33 x 35 x 60mm
IP Rating	IP20	Power	5 W
Impact Resistance	1m	Battery Type	Polymer 3.7V / 500mAh
Color Temperature (K)	3535 Spot: 11000–14000K, Ra>70; COB Flood: 7500–8500K, Ra>65		
Light Modes	Spot High/Low / Red / Blue / Red-Blue Flash; Flood High/Mid/Low / Strobe 8Hz; Memory, 8s auto-off		

Mode	Spot High	Spot Low	Flood High	Flood Mid	Flood Low
Light Output	240 Lumens	120 Lumens	76 Lumens	38 Lumens	7.5 Lumens
Beam Distance	29m	20m	13m	9m	5m
RunTime	2.5 Hours	5 Hours	3.5 Hours	6.5 Hours	12 Hours








Explore Our
ODM Design Process

Scan to Watch

Design Process & Company Video

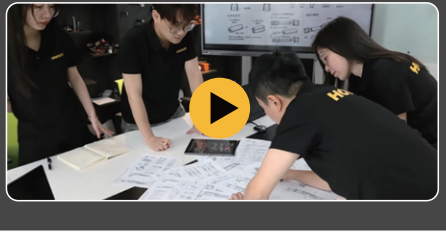

See Our
Manufacturing & Quality

Scan to Watch

Production, PCB Assembly & Lab Testing



HOKOLITE

Ningbo Yinzhou Adelante Lighting Co., Ltd

Address: RM1401, Haoru Bldg, NO.468 Middle Taikang Road, Yinzhou District, Ningbo, China

Tel: 0086-574-89020696 / 89020698 / 89020699

Web: www.hokolitepro.com

Email: info@hokolitepro.com

HOKOLITE OFFICIAL CHANNELS

Scan to visit our website and social media pages

Website | Instagram | Facebook | Youtube | Tiktok